

Procedure to Write the Flash File.


If after an update, your Contact List is missing 2 Icons you will need to reload the Logo File to the radio




Same procedure when you upgrade.

Put your radio in DFU mode by Holding P1 and Power UP.


Your radio will look like this.

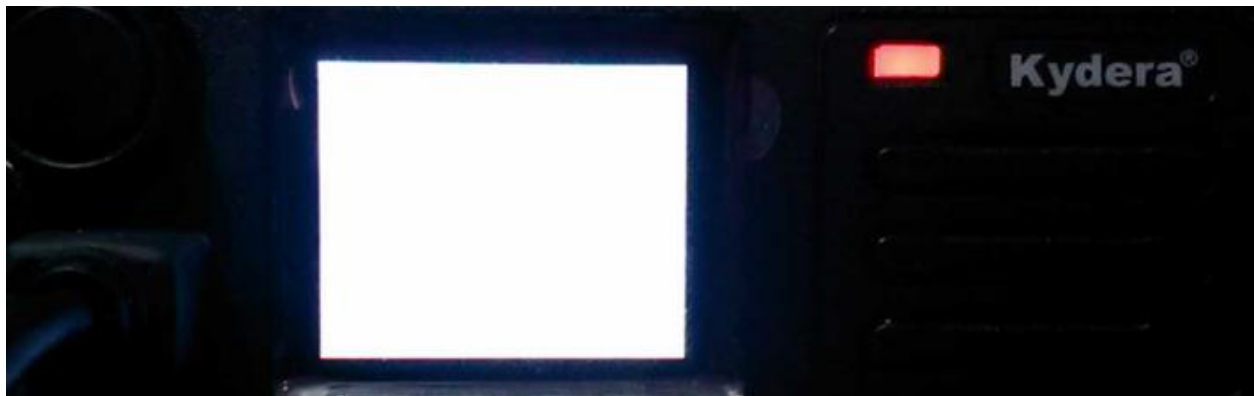


Then. Open your IAP and and Open Flash File
And browse to the location of your Flash File.

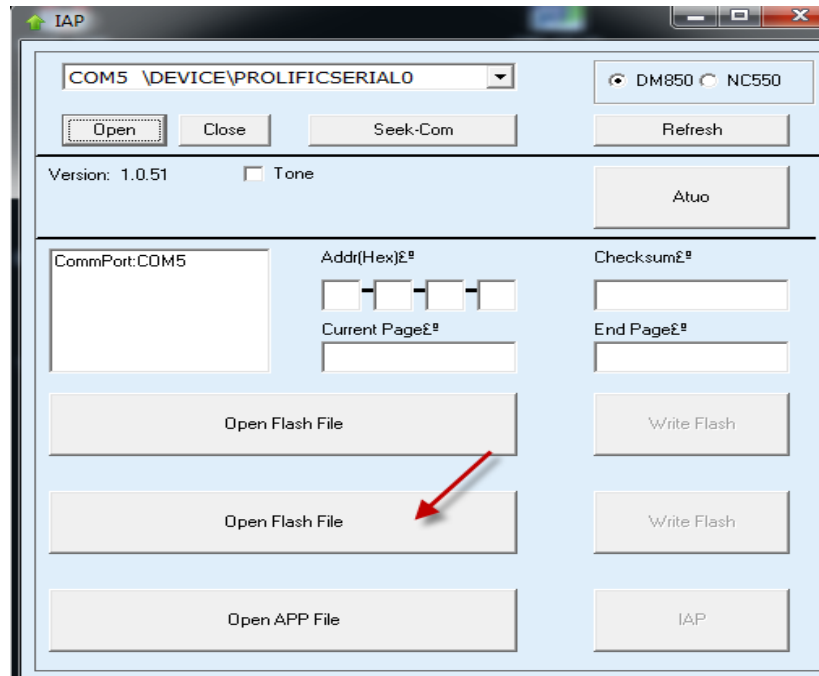

Then Write Flash

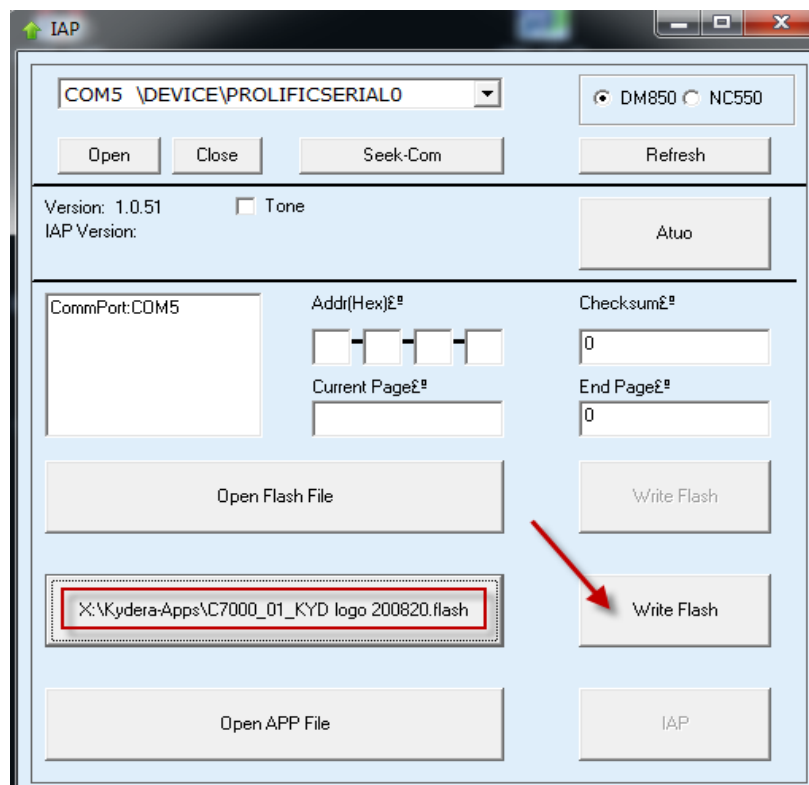

You have 383 block to write.

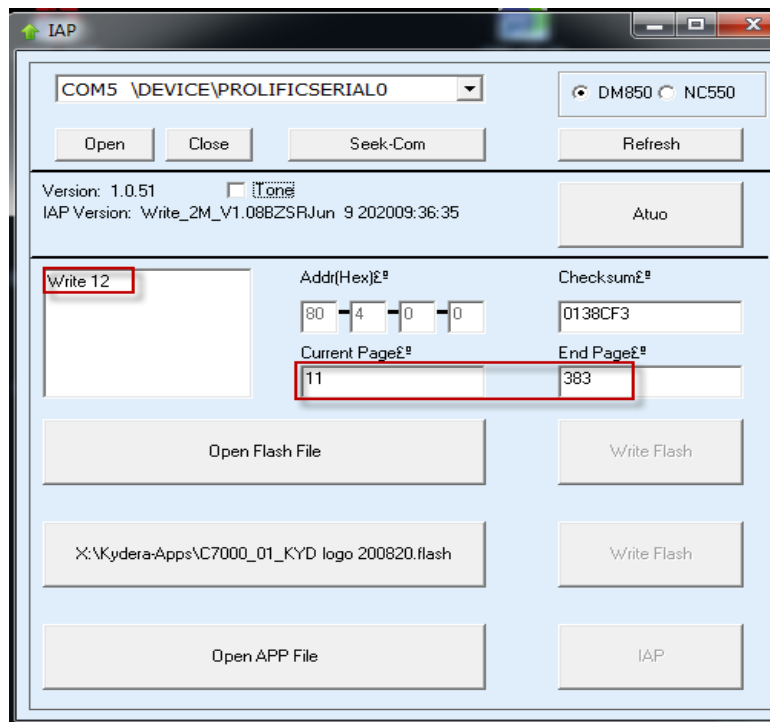

IAP

COM5 \DEVICE\PROLIFICSERIAL0 DM850 NC550

Open Close Seek-Com Refresh

Version: 1.0.51 IAP Version: Write_2M_V1.08BZSRJun 9 202009:36:35

Write 12 Addr(Hex) 80 4 0 0 Checksum 0138CF3


Current Page 11 End Page 383

Open Flash File Write Flash

X:\Kydera-Apps\C7000_01_KYD logo 200820.flash Write Flash

Open APP File IAP

Once done you will get the message Write Checksum Right

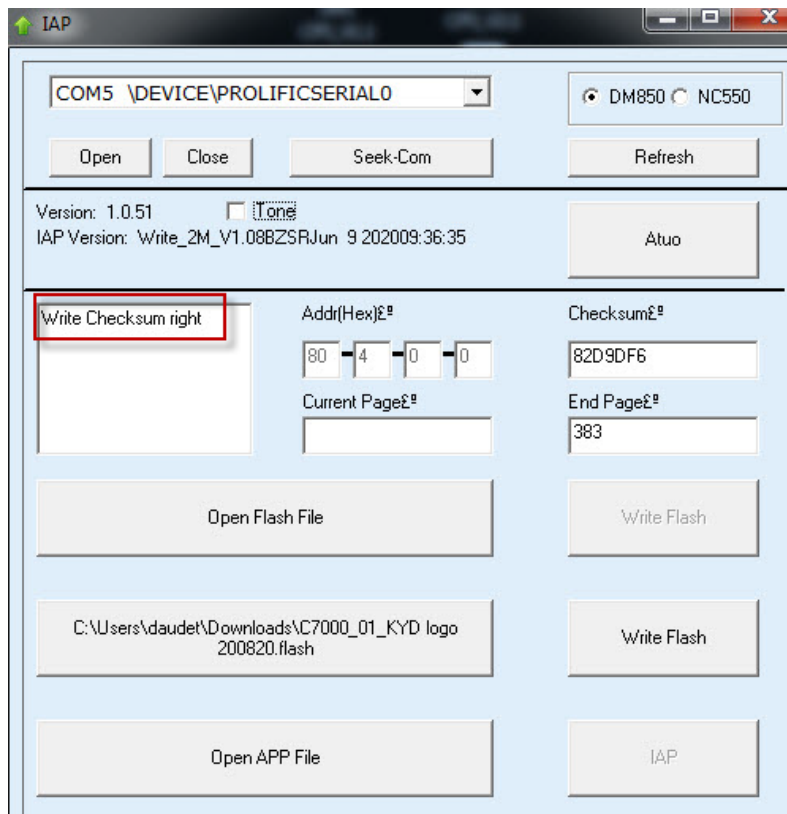

IAP

COM5 \DEVICE\PROLIFICSERIAL0 DM850 NC550

Open Close Seek-Com Refresh

Version: 1.0.51 IAP Version: Write_2M_V1.08BZSRJun 9 202009:36:35

Write Checksum right Addr(Hex) 80 4 0 0 Checksum 82D9DF6

Current Page End Page 383

Open Flash File Write Flash

C:\Users\daudet\Downloads\C7000_01_KYD logo 200820.flash Write Flash

Open APP File IAP

**But the radio will not Power OFF by itself.
You need to power off to get out of DFU Mode.**

**Then Power it back up
Then your Contact List should look good.**

